



FDSB291 / FDSB292 / FDS221-R / FDS221-W

Sinteso™

Sounder bases, Alarm sounders



addressable (FDnet), collective

- **Sounder base FDSB291**

- 11 tonalities selectable, 2 activation levels programmable
- Sound intensity up to 88 dB(A), adjustable on 2 levels
- Compatible to all addressable Sinteso point detectors
- Connector for 1 external alarm indicator
- Power supply and communication via FDnet

- **Sounder base FDSB292**

- 1 tonality intermittent, 1 activation level
- Sound intensity 84 dB(A)
- Compatible only with the FDOOT241-9 / FDOOT241-A9 on a collective detector line
- Connector for 1 external alarm indicator
- Power supply via detector line

- **Alarm sounder FDS221**

- 11 tonalities selectable, 2 activation levels programmable
- Sound intensity up to 99 dB(A), adjustable on 3 levels
- Compatible to the addressable detector base
- Use of base accessories or sealing element possible
- Monitoring of device status
- Power supply and communication via FDnet

Characteristics

- **Environmental**

- ecologically processing
- recyclable materials
- electronic und synthetic material simple separable

- **Characteristics sounder base FDSB291**

- base addressable
- sound intensity and sounds adjustable, sounds are synchronized with all alarm devices
- screw less connection terminals
- no auxiliary power supply required; power is supplied via FDnet
- incl. 2 micro terminals DBZ1190-AA
- space for auxiliary terminals, for the connection of an alarm indicator

- **Characteristics sounder base FDSB292**

- base collective
- 1 sound, 1 sound intensity, no synchronization of sounds
- screw less connection terminals
- no auxiliary power supply required; power is supplied via detector line
- incl. 2 micro terminals DBZ1190-AA
- space for auxiliary terminals, for the connection of an alarm indicator

- **Characteristics alarm sounder FDS221-R / FDS221-W**

- protected electronics, high-quality components
- integrated short-circuit isolator
- sound intensity and sounds adjustable
- screw less connection terminals
- no auxiliary power supply required; power is supplied via FDnet
- very low operating current
- periodic testing of the acoustic part (not audible)
- monitoring of device status

Alarm sounder FDS221-R / FDS221-W

- **Function**

- loud alarming in case of fire alarm, clearly recognizable as danger signal

- **Application**

- along escape routes
- corridors
- staircases

Sounder base FDSB291 / FDSB292

- **Function**

- The sounder base FDSB291 serves for acoustic alarming in an addressed fire detection system.
- The sounder base FDSB292 serves for acoustic alarming on a collective detector line, when the collective detector line is migrated to FDnet, the buzzer of the sounder base FDSB292 behaves in the same way as the sounder base FDSB291.
- In case of a fire alarm, the signal base triggers an acoustic signal in parallel to the flashing of the detector LED.


- **Application**

- hotel rooms
- hospital rooms
- nursing homes, living rooms and lounges

Installation FDSB22x


- The sounder base FDSB291 / FDSB292 and the detector compose a unity, which already has a base and is mounted on ceilings.
- for recess supply wiring
- for surface supply wiring, cable diameter up to 6 mm

FDSB291
Sounder base (FDnet)



FDOOT or FDO or FDT


FDSB292
Sounder base (collective)



FDOOT241-9 or FDOOT241-A9
in collective mode


Installation FDS221

- The alarm sounder FDS221-R / FDS221-W is inserted directly in the detector base and mounted on walls or on the ceiling.
- for recess supply wiring
- for surface supply wiring, cable diameter up to 6 mm in diameter with base FDB221, otherwise use base attachment FDB291 or use base attachment humid FDB293.
- for higher protection category use sealing element FDBZ295 and only with recess supply wiring




FDS221-R
Alarm sounder red

FDB221 / FDB221-AA
Detector base
addressable
or
FDB222
Detector base flat,
addressable



FDS221-W
Alarm sounder white




FDS221-x
Alarm sounder red or white

FDBZ295
Sealing element
FDB221 / FDB221-AA
Detector base
addressable


Dimensions

FDS221-R / FDS221-W without base




Height with base FDB221 = 52.5 mm
Height with base FDB222 = 47.5 mm
Height with base FDB221 and
sealing element FDBZ295 = 55 mm


FDSB291 / FDSB292

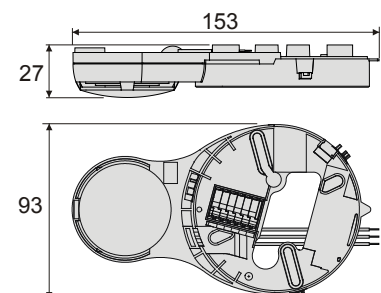


Technical data

	FDS221-R / FDS221-W	FDSB291	FDSB292
Operating voltage	DC 12...33 V	DC 12...33 V	DC 12...33 V
Operating current (quiescent)	250 μ A	150 μ A	150 μ A
Sound activated	3.5 mA	1.2 mA	1.2 mA
Number of sounds	11 2 activation levels 3 sound intensities	11 2 activation levels 2 sound intensities	1 1 activation level 1 sound intensity
Sound intensity	80...99 dB(A)	80...88 dB(A)	84 dB(A)
Ext. alarm indicator (AI)	2	1	1
Operating temperature	-25...+70 °C	-25...+70 °C	-25...+70 °C
Storage temperature	-30...+75 °C	-30...+75 °C	-30...+75 °C
Humidity	\leq 95 % rel.	\leq 95 % rel.	\leq 95 % rel.
Communication protocol	FDnet	FDnet	collective
Connection terminals	according to detector base	0.2...1.5 mm ²	0.2...1.5 mm ²
Color	red, ~RAL 3000 white, ~RAL 9010	white, ~RAL 9010	white, ~RAL 9010
Protection category EN 60529 / IEC 60529 with	mounting on the wall with cable feed from bottom ->	IP43	IP43
- base FDB221 or FDB222	IP43, otherwise IP40	-	-
- base attachment FDB291	IP44	-	-
- base FDB221 and sealing element FDBZ295	IP54	-	-
- base attachment humid FDB293			
Standards	EN54-3, EN54-17	EN54-3	EN54-3
Approvals:			
• VdS	G204073	G204062	G204062
• LPCB	531p/01	1157a/02	1157a/03
• DNV GL (Marine)	59 826 - 13 HH	59 826 - 13 HH	59 826 - 13 HH
System compatibility FDnet	FS20, AlgoRex, SIGMASYS	-	-
System compatibility collective	-	-	CZ10, BC10, FC10, XC10, CS11, FC330A, FC700A, SIGMASYS, BMS, SPF, SM80/88/D100
QS standards	Siemens Standard SN 36350		

07  0786	FDS221-R	Siemens Switzerland Ltd; Gubelstrasse 22 CH-6301 Zug Technical data: see doc. 008109
FDS221-R - Sounder incl. short-circuit isolator for use in fire detection and fire alarm systems installed in buildings.		
305/2011/EU (CPR): EN 54-3 / EN 54-17 ; 2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2011/65/EU (RoHS): EN 50581		
The declared performance and conformity can be seen in the Declaration of Performance (DoP) and the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or http://siemens.com/bt/download		
DoP No.: 0786-CPR-20012; DoC No.: CED-FDS221		

07  0786	FDS221-W	Siemens Switzerland Ltd; Gubelstrasse 22 CH-6301 Zug Technical data: see doc. 008109
FDS221-W - Sounder incl. short-circuit isolator for use in fire detection and fire alarm systems installed in buildings.		
305/2011/EU (CPR): EN 54-3 / EN 54-17 ; 2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2011/65/EU (RoHS): EN 50581		
The declared performance and conformity can be seen in the Declaration of Performance (DoP) and the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or http://siemens.com/bt/download		
DoP No.: 0786-CPR-20012; DoC No.: CED-FDS221		

07  0786	FDSB291 / FDSB292	Siemens Switzerland Ltd; Gubelstrasse 22 CH-6301 Zug Technical data: see doc. 007025/009769
FDSB291/FDSB292 - Sounder for use in fire detection and fire alarm systems installed in buildings.		
305/2011/EU (CPR): EN 54-3 ; 2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2011/65/EU (RoHS): EN 50581		
The declared performance and conformity can be seen in the Declaration of Performance (DoP) and the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or http://siemens.com/bt/download		
DoP No.: 0786-CPR-20013; DoC No.: CED-FDSB291-FDSB292		

Details for ordering

Type	Part no	Designation	Weight
FDSB291	A5Q00001647	Sounder base (FDnet)	0.076 kg
FDSB292	A5Q00013755	Sounder base (collective)	0.076 kg
FDS221-R	A5Q00004117	Alarm sounder red	0.130 kg
FDS221-W	A5Q00006711	Alarm sounder white	0.130 kg
FDBZ295	S54319-F10-A1	Sealing element	0.030 kg

Base and base accessories see document 007775, Details see equipment overview 008164, Details about system compatibility see List of compatibility 008331

Issued by
Siemens Switzerland Ltd
Building Technologies Division
International Headquarters
Gubelstrasse 22
CH-6301 Zug
Tel. +41 41 – 724 24 24
www.siemens.com/buildingtechnologies

© Siemens Switzerland Ltd, 2015
Technical specifications and availability subject to change without notice.